



12 KEY, 57x73 mm, matrix

- Type **1T12ST1** flat overlay, non tactile
- Type **1TF12ST1** embossed keys, soft touch
- Type **1TC12ST1** flat overlay, metal snap domes
- Type **1TCF12ST1** embossed keys and metal domes

Tail: after the 100 mm standard length,
a 200 mm version is available.

Two colours' graphic layer: black the ground and text,
yellow the keys' ground.

Other colours or customized graphic by request.

Rear silk-screened on antiscratching polyester.

All keyboard layers are laser cut.

Circuit, spacer, and tail cover: polyester.

Rear adhesive layer: 3M468.

Tracks and pads: silver.

Connector: female, 7 ways on 2.54mm pitch.

Embossing on type 1TF and 1TCF:
Ø 11mm round, 0,5mm thick.


Don't trap grains or air bubbles
between keyboard and background.

 [printable page \(PDF\)](#)


[customize your keyboard! \(CDR\)](#) 



this keyboard (framed)
can be assembled with
Teko TK-F.7 enclosures too

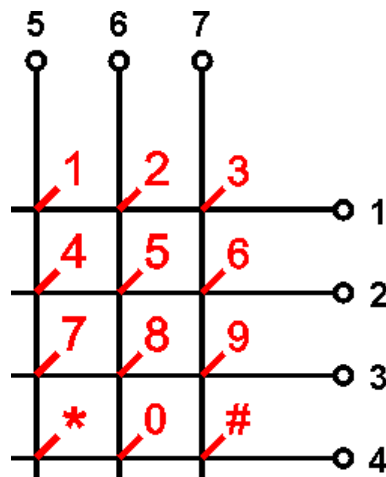

RohS Conformity: this product is compliant to
european directive 2002/95/CEE - 27/01/2003

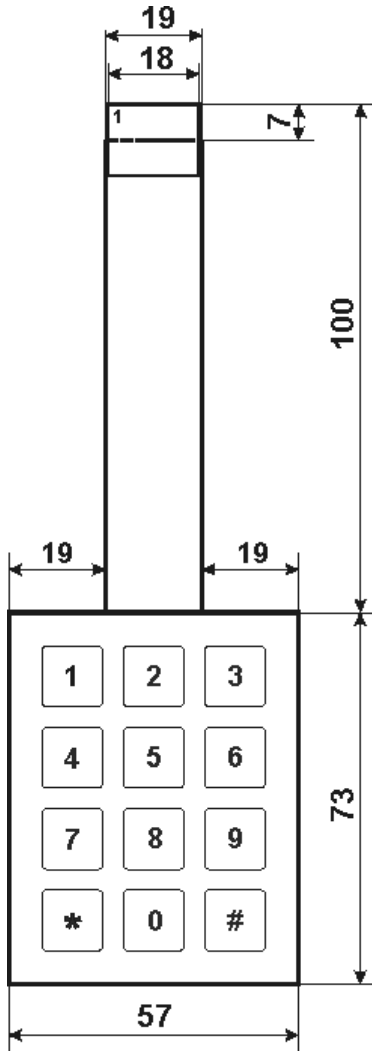

Keyboards materials and finishing, electrical and mechanical specification

custom Fill the form to customize this keyboard

new Fill the form to request new keyboard on customers' specifications

